
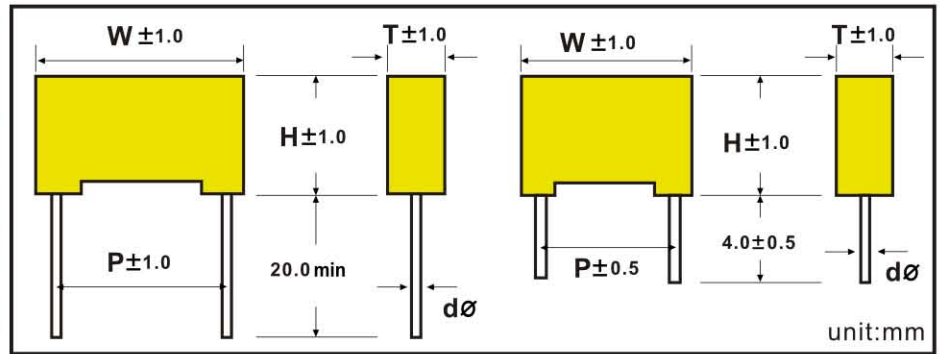


METALLIZED POLYPROPYLENE FILM CAPACITOR Class X2

X2安規電容器

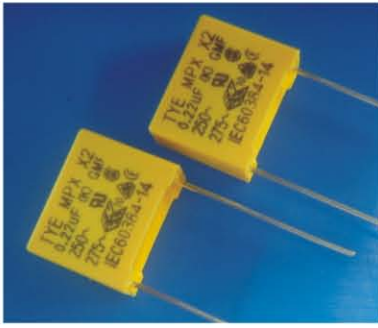

Dimensions

Cap.(uF)	size	250V.AC / 275V.AC					unit:mm
		W	H	T	P±1.0	導線 dØ	
0.0047		13.0	11.0	5.0	10.0	0.6	
0.0056		13.0	11.0	5.0	10.0	0.6	
0.0068		13.0	11.0	5.0	10.0	0.6	
0.0082		13.0	11.0	5.0	10.0	0.6	
0.01		13.0	11.0	5.0	10.0	0.6	
0.012		13.0	11.0	5.0	10.0	0.6	
0.015		13.0	11.0	5.0	10.0	0.6	
0.018		13.0	11.0	5.0	10.0	0.6	
0.022		13.0	11.0	5.0	10.0	0.6	
0.027		13.0	12.0	6.0	10.0	0.6	
0.033		13.0	11.0	5.0	10.0	0.6	
0.033		13.0	12.0	6.0	10.0	0.6	
0.047		13.0	11.0	5.0	10.0	0.6	
0.056		13.0	11.0	5.0	10.0	0.6	
0.068		13.0	11.0	5.0	10.0	0.6	
0.082		13.0	12.0	6.0	10.0	0.6	
0.1		13.0	12.0	6.0	10.0	0.6	
0.039		18.0	11.0	5.0	15.0	0.8	
0.047		18.0	11.0	5.0	15.0	0.8	
0.056		18.0	12.0	6.0	15.0	0.8	
0.068		18.0	12.0	6.0	15.0	0.8	
0.082		18.0	11.0	5.0	15.0	0.8	
0.082		18.0	12.0	6.0	15.0	0.8	
0.1		18.0	11.0	5.0	15.0	0.8	
0.1		18.0	12.0	6.0	15.0	0.8	
0.12		18.0	12.0	6.0	15.0	0.8	
0.12		18.0	13.5	7.5	15.0	0.8	
0.15		18.0	13.5	7.5	15.0	0.8	
0.15		18.0	14.5	8.5	15.0	0.8	
0.18		18.0	13.5	7.5	15.0	0.8	
0.22		18.0	14.5	8.5	15.0	0.8	
0.27		18.0	16.0	10.0	15.0	0.8	
0.33		18.0	16.0	10.0	15.0	0.8	
0.39		18.0	19.0	11.0	15.0	0.8	
0.47		18.0	19.0	11.0	15.0	0.8	
0.15		26.5	16.5	7.0	22.5	0.8	
0.18		26.5	16.5	7.0	22.5	0.8	
0.22		26.5	16.5	7.0	22.5	0.8	
0.27		26.5	17.0	8.5	22.5	0.8	
0.33		26.5	17.0	8.5	22.5	0.8	
0.39		26.5	19.0	10.0	22.5	0.8	
0.47		26.5	19.0	10.0	22.5	0.8	
0.56		26.5	19.0	10.0	22.5	0.8	
0.68		26.5	19.0	10.0	22.5	0.8	
0.47		32.0	20.0	11.0	27.5	0.8	
0.56		32.0	20.0	11.0	27.5	0.8	
0.68		32.0	20.0	11.0	27.5	0.8	
0.82		32.0	22.0	13.0	27.5	0.8	
1.0		32.0	22.0	13.0	27.5	0.8	
1.2		32.0	30.0	15.0	27.5	0.8	
1.5		32.0	30.0	15.0	27.5	0.8	
1.0		37.0	24.0	13.5	32.5	0.8	
1.2		37.0	24.0	13.5	32.5	0.8	
1.5		37.0	26.0	15.0	32.5	0.8	
1.8		37.0	29.0	19.0	32.5	0.8	
2.2		37.0	29.0	19.0	32.5	0.8	

Note:250VAC:UL , CSA (Up to 1.0uF)
275VAC:VDE , ENEC